


Hướng dẫn cài đặt Wifi modem AC1000F

1. Đăng nhập vào modem:

Mở trình duyệt web (Chrome, Firefox, ...), nhập địa chỉ mặc định của modem:
<http://192.168.1.1>

Account mặc định: xem dưới đáy modem hoặc gọi lên tổng đài FPT Telecom.

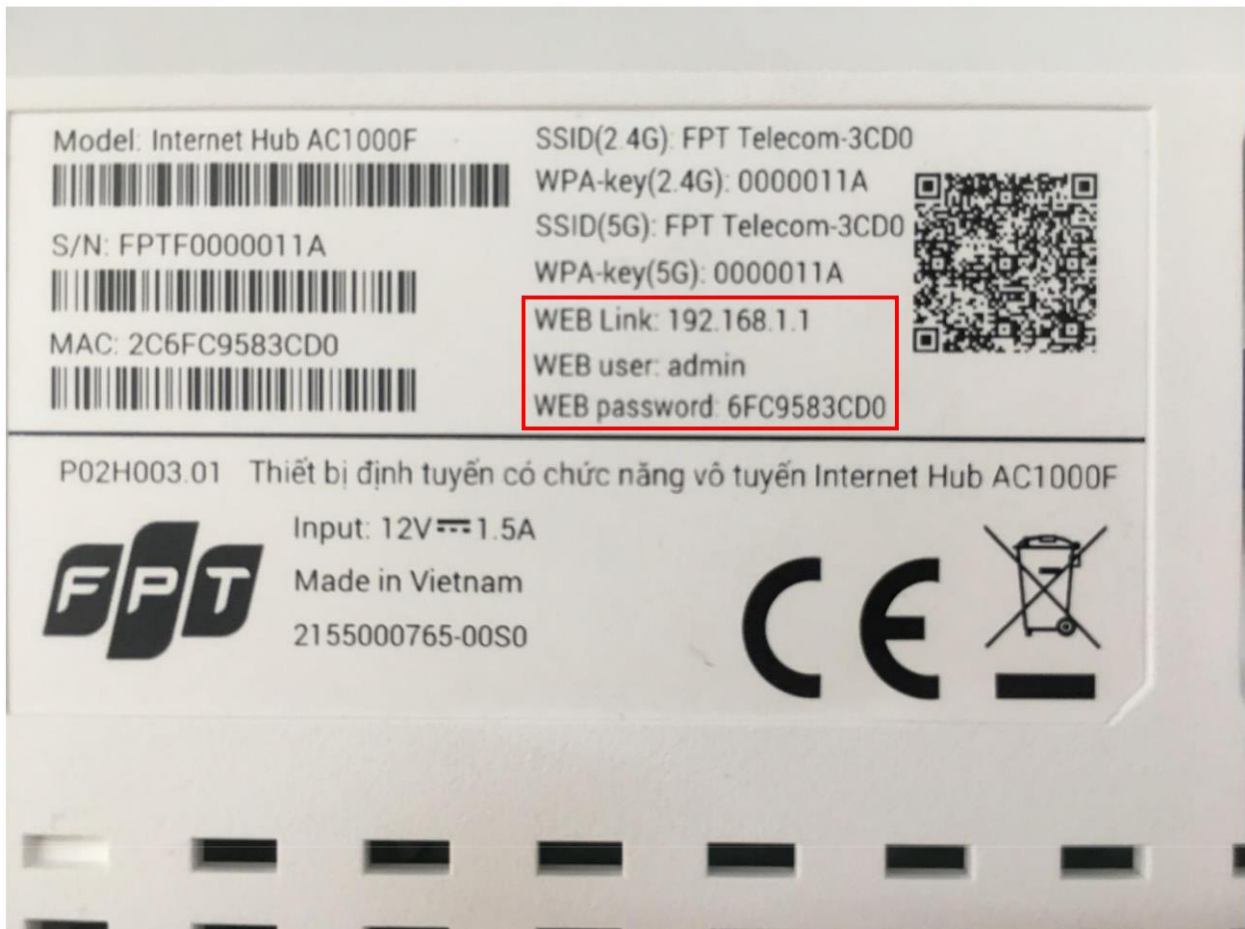

2. Cài đặt Wifi.

Lựa chọn **Network** → **Wireless 2.4G** như hình.

- **Enable/ Disable 2.4 Radio** để **bật/ tắt** chức năng phát sóng wifi
- Đặt **tên Wifi** ở ô **SSID Name**
- Đặt **mật khẩu Wifi** ở ô **Security Passphrase** (độ dài mật khẩu wifi từ 8~63 ký tự)
- Khuyến cáo đặt tên, kiểu xác thực, kiểu mã hoá, mật khẩu ở cả 2 băng tần 2.4GHz và 5GHz trùng nhau để kích hoạt tính năng Bandsteering
- Sau đó chọn **Save** để lưu cài đặt.
- **Thao tác tương tự đối với Wireless 5G**

GPON Home Gateway x +

Không bảo mật | 192.168.1.1/cgi-bin/index.asp

English Logout

FPT Telecom

Quick Start
Internet
LAN
Wireless 2.4G
Wireless 5G
NAT
QoS

Status Network **Advanced** Access Maintenance Help

Set Wireless radio state

2.4G Radio Enable Disable Enable để bật WIFI 2.4Ghz
Disable để tắt WIFI 2.4Ghz

Wireless Basic information

Beacon Interval 100 (range: 20-999)
DTIM 1 (range: 1-255)
802.11 Mode 802.11b+g+n
Wireless Power Level 100%
Max Client Number 0 (range: 0-31, 0 means no limit)

Channel Chọn VIETNAM [VIETNAM] Auto Current Channel : 9
Notice: Wireless 2.4G and 5G must be the same country!

11n Settings

Channel Bandwidth 40 MHz
Guard Interval 800 nsec
MCS AUTO

Cấu hình mật định

Chọn channel Auto hoặc chọn từ 1 → 13

SSID Settings

SSID Index 1 Cấu hình mật định

PerSSID Switch Enable Disable

SSID Name FPT Telecom-3CD0 Đặt tên mạng WIFI

SSID Broadcast State Enable Disable Tính năng hiển thị SSID Broadcast
Enable là để bật tính năng
Disable là để tắt tính năng

Select Security Type

Authentication Type WPA-PSK/WPA2-PSK Cấu hình mật định

Select Encryption Type

Encryption Type TKIP/AES

Enter security passphrase

Security Passphrase 12345678 (8~63 characters or 64 Hex string) Nhập password cho WIFI

(Attention: if SSID1 Name, Authentication Type, Encryption Type and Security Passphrase of 2.4G Wireless and 5G Wireless are all the same, Bandsteering function will work. Otherwise, Bandsteering will be disable.)

WPS Settings

Use WPS Enable Disable

WPS State Configured

WPS Progress Idle

WPS Mode PBC Cấu hình mật định

Click "Start WPS" to start wps or click "Stop WPS" to stop wps

Start WPS

Set MAC access control state

Access Control State Enable Disable

Click "Save" to save your settings

Save Nhấn Save để lưu lại cấu hình