


# Hướng dẫn cài đặt Wifi modem EP9108/ 9108W

## 1. Đăng nhập vào modem:

Mở trình duyệt web (Chrome, Firefox, ...), nhập địa chỉ mặc định của modem <http://192.168.1.1>

User/Pass mặc định: **admin/admin** hoặc gọi lên tổng đài FPT Telecom

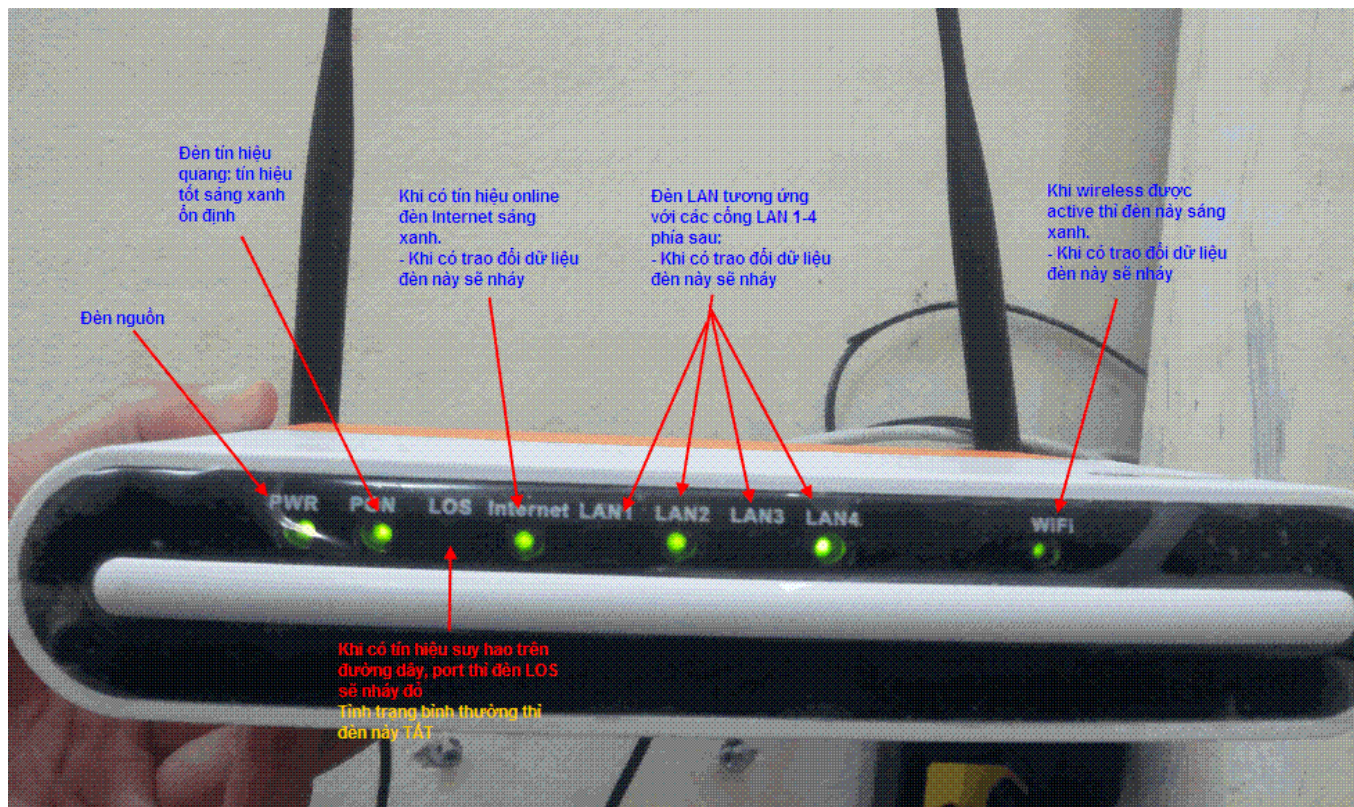

Vào **Internet** chọn **WLAN Config**

## 2. Tắt/ Mở Wifi:

Tick/ bỏ tích **Enable WLAN** để bật/ tắt chức năng phát sóng wifi

## 3. Đổi tên sóng Wifi

Đổi tên sóng wifi tại ô **SSID**

Bấm **Apply** để hoàn tất.

**INTERNET** | **STATUS** | **INTERNET** | **SECURITY** | **APPLICATION** | **MANAGEMENT** | **DIAGNOSIS** | **HELP**

WAN CONFIG | PORT BINDING | DHCP SERVER | **WLAN CONFIG** | REMOTE MGMT | QOS | TIME CONFIG | ROUTING

**WLAN CONFIG**

Configuring the basic functions of Wireless LAN, including Enable or Disble WLAN, Scanning and searching for Hidden SSID, Configuring the name of Wireless AP. Click 'Apply' button to take new settings into effect.

Enabled Wireless ssid2     Enabled Wireless ssid3     Enabled Wireless ssid4

SSID2: FPT-Telecom2    SSID3: FPT-Telecom3    SSID4: FPT-Telecom4

**Enable WLAN**    **Enable/Disable WIFI**

Hide SSID1

WLAN Client separation

Disabled WMM Broadcast

**Enable WMM**

**Đổi tên WIFI**

SSID: FPT-Telecom

BSSID: FC:8B:97:76:0B:77

Band: 2.4GHz

Channel selection: Auto    The current channel: 1

802.11n/EWC: Automatic

Bandwidth: 20MHz in Both Bands    Current Bandwidth: 20MHz

Controlled sideband: Lower    Current sideband: None

802.11n rate: Auto

802.11n protecting mode: Auto

Only support 802.11n Client: Off

54g rate: 54 Mbps

Multicast Rate: Auto

Basic rate: Default

XPress Technology: Enabled

Transmission power: 100%

WMM: Enabled

WMM(Quality of service): Forbidden

WMMAPSD: Enabled

       **Click Advanced để vào phần cấu hình mã hóa, mật khẩu...**

#### 4. Đổi mật khẩu Wifi

Bấm **Advanced** để vào phần thiết lập mật khẩu Wifi

Giao diện đổi mật khẩu:

- **Choose SSID:** chọn tên sóng Wifi cần đổi mật khẩu
- **WPA Pre-Shared Key:** đổi mật khẩu wifi (lưu ý 8 ký tự trở lên, có phân biệt chữ hoa, chữ thường).
- Bấm **Apply** để hoàn tất.

**FPT** Fpt Telecom    LOGOUT

**INTERNET** | **STATUS** | **INTERNET** | **SECURITY** | **APPLICATION** | **MANAGEMENT** | **DIAGNOSIS** | **HELP**

WAN CONFIG | PORT BINDING | DHCP SERVER | **WLAN CONFIG** | REMOTE MGMT | QOS | TIME CONFIG | ROUTING

**WLAN CONFIG**

**Wireless Security Configuration**

Configuring Security for Wireless LAN. Including Authentication Method, Data Encryption Method, Wi-Fi Authentication Key and Key Length.

Choose SSID: FPT-Telecom

Wifi authentication: Mixed WPA2/WPA -PSK

   [Click here to display](#)    **Đổi mật khẩu WIFI**

WPA session key re-generation interval: 0

WPA encryption: TKIP+AES

WPA encryption: Disable