

Hướng dẫn đổi tên Wifi modem AC1000F


Thao tác đổi tên wifi **đễ dàng và đơn giản hơn** khi sử dụng ứng dụng Hi FPT. [Chi tiết](#)

1. Đăng nhập vào modem:

Mở trình duyệt web (Chrome, Firefox, ...), nhập địa chỉ mặc định của modem:

<http://192.168.1.1>

Account mặc định: xem dưới đáy modem hoặc gọi lên tổng đài FPT Telecom.

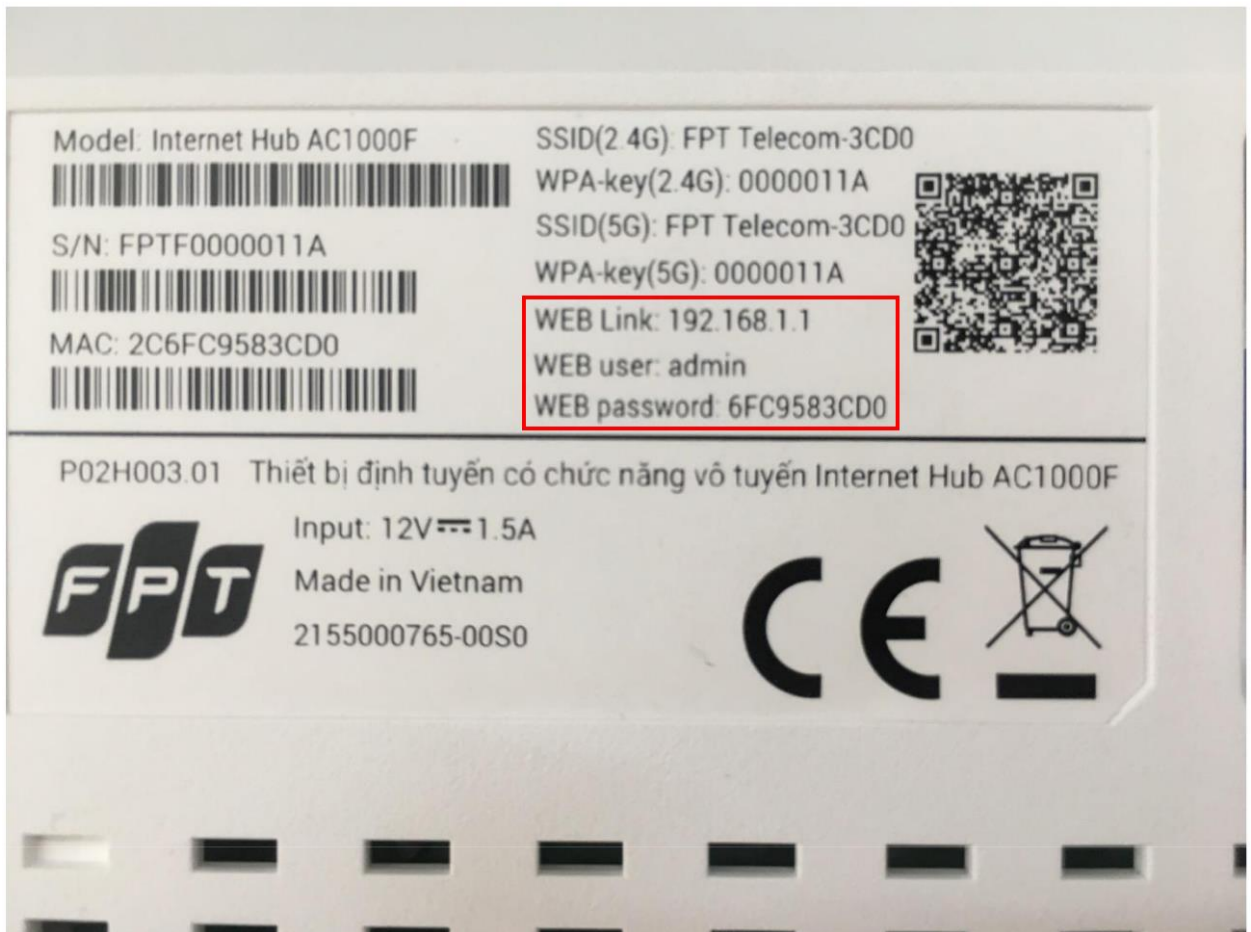

2. Đổi tên Wifi.

Lựa chọn **Network** → **Wireless 2.4G** như hình.

- Đổi tên Wifi ở ô **SSID Name**
- Khuyến cáo đặt tên, kiểu xác thực, kiểu mã hoá, mật khẩu ở cả 2 băng tần 2.4GHz và 5GHz trùng nhau để kích hoạt tính năng Bandsteering
- Sau đó chọn **Save** để lưu cài đặt.
- **Thao tác tương tự đối với Wireless 5G**

The screenshot shows the configuration page for the GPON Home Gateway. The page is titled "GPON Home Gateway" and the URL is "192.168.1.1/cgi-bin/index.asp". The page is in English and has a "Logout" button. The main navigation menu includes "Status", "Network", "Advanced", "Access", "Maintenance", and "Help". The "Network" menu is selected, and the "Wireless 2.4G" option is highlighted in the left sidebar. The main content area is divided into several sections:

- Set Wireless radio state:** This section has a red box around it. It contains a "2.4G Radio" setting with "Enable" selected (radio button) and "Disable" as an option. To the right, there are instructions: "Enable để bật WIFI 2.4Ghz" and "Disable để tắt WIFI 2.4Ghz".
- Wireless Basic Information:** This section also has a red box around it. It contains several settings: "Beacon Interval" (100), "DTIM" (1), "802.11 Mode" (802.11b+g+n), "Wireless Power Level" (100%), and "Max Client Number" (0). To the right, there is a red note: "Cấu hình mặc định".
- Channel:** This section has a red box around it. It contains a "Chọn VIETNAM" label, a dropdown menu set to "VIETNAM", and an "Auto" dropdown menu. To the right, there is a red note: "Chọn channel Auto hoặc chọn từ 1 → 13". Below this, there is a "Current Channel" field showing "9" and a red note: "Notice: Wireless 2.4G and 5G must be the same country!".
- 11n Settings:** This section has a red box around it. It contains three settings: "Channel Bandwidth" (40 MHz), "Guard Interval" (800 nsec), and "MCS" (AUTO). To the right, there is a red note: "Cấu hình mặc định".